

# Stainless Steel

## Technical Data Sheet

303, 304, 310, 316, 317, 409, 410, 416, 420, 430, 301, 17-4PH, 17-7PH, etc.



# Table of Contents

---

Stainless Steel 301	<b>4</b>
Stainless Steel 303	<b>5</b>
Stainless Steel 304	<b>6</b>
Stainless Steel 310	<b>7</b>
Stainless Steel 316	<b>8</b>
Stainless Steel 317	<b>9</b>
Stainless Steel 409	<b>10</b>
Stainless Steel 410	<b>11</b>
Stainless Steel 416	<b>12</b>
Stainless Steel 420	<b>13</b>
Stainless Steel 430	<b>14</b>
Stainless Steel 17-4PH	<b>15</b>
Stainless Steel 17-7PH	<b>16</b>
Conversion Table	<b>17-19</b>

## Table of Contents (continued)

---


	Angles	<b>20</b>
	Square and Rectangular HSS Tubes	<b>21</b>
	Round HSS Tubes	<b>22</b>
	Pipes	<b>23–30</b>
	Round Bars	<b>31</b>
	Flat Bars	<b>32–33</b>
	Square Bars	<b>34</b>
	Hexagonal Bars	<b>35</b>
	H-Beams	<b>36</b>
	U-Channels	<b>37</b>
	Plates	<b>38</b>
	Sheets	<b>39</b>
	Expanded Metals	<b>40–41</b>
	Security Mesh	<b>42</b>
	Gratings	<b>43</b>

# Stainless Steel 301

Stainless Steel 301 is known for its excellent cold formability and its ability to develop high mechanical strength. It is frequently used in applications requiring elasticity, spring properties, and bending.

## Recommended for

- **Stainless steel springs:** clips, fasteners, flat springs
- **Cold-formed parts:** housings, bent components, flanges
- **Light structural applications**
- **Transportation and aerospace equipment:** panels, liners



## Mechanical Properties

	<i>Annealed</i>	<i>1/2 Hard</i>	<i>Full Hard</i>
<b>Tensile Strength</b>	~75,000 psi	~125,000 psi	~185,000 psi
<b>Yield Strength</b>	~30,000 psi	~75,000 psi	~140,000 psi
<b>Rockwell Hardness</b>	~B85	~C30	~C45
<b>Elongation (2 in.)</b>	~50%	~25%	~10%
<b>Corrosion Resistance</b>	Excellent	Moderate	Poor
<b>Weldability</b>	Very good	Good	Difficult
<b>Heat Treatment</b>	Not hardenable	None	None

# Stainless Steel 303

Stainless Steel 303 offers excellent machinability while maintaining good corrosion resistance. With the addition of sulfur, it is ideal for high-speed machining, but less suitable for bending or welding.

## Recommended for

- **Precision machining:** turned parts, shafts, bolts
- **Mechanical industry:** fasteners, connectors, fittings
- **Mass production:** non-welded machined components



## Mechanical Properties

*Typical Value*


<b>Tensile Strength</b>	~85,000 psi
<b>Yield Strength</b>	~45,000 psi
<b>Brinell Hardness</b>	~200 HB
<b>Elongation (2 in.)</b>	~35%
<b>Corrosion Resistance</b>	Good
<b>Weldability</b>	Poor – not recommended
<b>Heat Treatment</b>	Not hardenable

# Stainless Steel 304

Stainless Steel 304 is the most common grade, widely used for its very good corrosion resistance, formability, and weldability. It offers an excellent balance of performance, durability, and ease of fabrication.

## Recommended for

- **Food equipment:** tanks, counters, utensils
- **Furniture and structures:** railings, stairs, frames
- **Manufacturing industry:** tanks, housings, bent sheets
- **Architectural finishes:** cladding, guardrails



## Mechanical Properties

*Typical Value*


<b>Tensile Strength</b>	~75,000 psi
<b>Yield Strength</b>	~30,000 psi
<b>Brinell Hardness</b>	~190 HB
<b>Elongation (2 in.)</b>	~55%
<b>Corrosion Resistance</b>	Very good
<b>Weldability</b>	Excellent
<b>Heat Treatment</b>	Not hardenable

# Stainless Steel 310

Stainless Steel 310 is designed to withstand high temperatures, up to approximately 1100 °C (2010 °F). With its high chromium and nickel content, it provides excellent thermal stability and oxidation resistance.

## Recommended for

- **Industrial furnaces:** grids, ducts, burners
- **Combustion systems:** heat exchangers, hot pipes
- **Thermal equipment:** ovens, chimneys, expansion joints
- **Petrochemical industry:** refineries, reactors



## Mechanical Properties

*Typical Value*


<b>Tensile Strength</b>	~75,000 psi
<b>Yield Strength</b>	~30,000 psi
<b>Brinell Hardness</b>	~160 HB
<b>Elongation (2 in.)</b>	~40%
<b>Corrosion Resistance</b>	Very good at high temperature
<b>Weldability</b>	Good
<b>Heat Treatment</b>	Not hardenable

# Stainless Steel 316

Stainless Steel 316 is an enhanced version of 304, with the addition of molybdenum providing excellent corrosion resistance, particularly in chloride, marine, or chemical environments.

## Recommended for

- **Marine applications:** railings, fasteners, hulls, anchors
- **Chemical and pharmaceutical industry:** tanks, piping, reactors
- **Medical equipment:** instruments, structures, non-critical implants
- **Food industry:** humid, saline, or acidic environments



## Mechanical Properties

### *Typical Value*


<b>Tensile Strength</b>	~75,000 psi
<b>Yield Strength</b>	~30,000 psi
<b>Brinell Hardness</b>	~150 to 160 HB
<b>Elongation (2 in.)</b>	~50%
<b>Corrosion Resistance</b>	Excellent
<b>Weldability</b>	Excellent
<b>Heat Treatment</b>	Not hardenable

# Stainless Steel 317

Stainless Steel 317 is an upgraded version of 316, with a higher molybdenum content (up to 3.5%), which improves its resistance to pitting and crevice corrosion in acidic or chloride-containing environments.

## Recommended for

- **Heavy chemical industry:** acids, chlorides, reducing environments
- **Wastewater treatment:** tanks, piping, fittings
- **Pharmaceutical and biomedical:** aseptic, aggressive environments
- **Pulp and paper:** bleaching systems, acid baths



## Mechanical Properties

*Typical Value*


<b>Tensile Strength</b>	~75,000 psi
<b>Yield Strength</b>	~30,000 psi
<b>Brinell Hardness</b>	~160 HB
<b>Elongation (2 in.)</b>	~50%
<b>Corrosion Resistance</b>	Excellent
<b>Weldability</b>	Very good
<b>Heat Treatment</b>	Not hardenable

# Stainless Steel 409

Stainless steel 409 is a chromium (nickel-free) stainless steel designed for high-temperature applications. It is widely used in the automotive industry, combining heat resistance with good formability.

## Recommended for

- **Automotive exhaust systems:** mufflers, pipes, manifolds
- **Industrial chimneys and heat ducts**
- **Moderately corrosive environments:** ducts, claddings, structures
- **Interior applications:** partitions, metal frameworks



## Mechanical Properties

### *Typical Value*

<b>Tensile Strength</b>	~55,000 psi
<b>Yield Strength</b>	~25,000 psi
<b>Brinell Hardness</b>	~170 HB
<b>Elongation (2 in.)</b>	~30%
<b>Corrosion Resistance</b>	Fair
<b>Weldability</b>	Good
<b>Heat Treatment</b>	Not hardenable

# Stainless Steel 410

Stainless steel 410 is known for its high hardness after heat treatment. It offers good mechanical strength and wear resistance. It's an excellent choice for parts that require hardness, toughness, and machinability.

## Recommended for

- **Mechanical components:** shafts, bushings, axles, rings
- **Industrial blades:** knives, cutting tools, scrapers
- **Heavy-duty fasteners:** bolts, screws, fittings subjected to friction
- **Pumping equipment:** seats, rings, pistons



## Mechanical Properties

### *Typical Value*

<b>Tensile Strength</b>	~95,000 to 110,000 psi
<b>Yield Strength</b>	~55,000 psi
<b>Rockwell Hardness</b>	~C35 to C45 (heat treated)
<b>Elongation (2 in.)</b>	~20% (untreated) to ~10% (heat treated)
<b>Corrosion Resistance</b>	Moderate
<b>Weldability</b>	Medium
<b>Heat Treatment</b>	Yes, hardenable

# Stainless Steel 416

Stainless steel 416 is modified with sulfur, making it one of the easiest stainless steels to machine. It can be heat treated to increase hardness and is mainly used for mass-produced machined parts.

## Recommended for

- **Precision turned parts:** shafts, rings, bolts, connectors
- **High-speed machining:** threads, gears, motorized shafts
- **Non-critical mechanical components**



## Mechanical Properties

### *Typical Value*


<b>Tensile Strength</b>	~85,000 to 100,000 psi
<b>Yield Strength</b>	~45,000 psi
<b>Rockwell Hardness</b>	~C28 to C40 (heat treated)
<b>Elongation (2 in.)</b>	~18% (untreated) to ~10% (heat treated)
<b>Corrosion Resistance</b>	Medium
<b>Weldability</b>	Low
<b>Heat Treatment</b>	Yes, hardenable

# Stainless Steel 420

Stainless steel 420 is high in carbon and designed to be hardened by heat treatment. It is especially valued for cutting applications, while providing a bright, polishable finish.

## Recommended for

- **Industrial blades and knives:** shears, scalpels, cutting blades
- **Medical and dental tools:** forceps, curettes, instruments
- **Springs, pins, and forming** tools
- **Applications** requiring hardness and shine



## Mechanical Properties

### Typical Value


<b>Tensile Strength</b>	~9,000 to 110,000 psi
<b>Yield Strength</b>	~50,000 psi
<b>Rockwell Hardness</b>	~C45 to C56 (heat treated)
<b>Elongation (2 in.)</b>	~10% (annealed), ~5% (hardened)
<b>Corrosion Resistance</b>	Moderate
<b>Weldability</b>	Low
<b>Heat Treatment</b>	Yes, hardenable

# Stainless Steel 430

Stainless steel 430 is non-hardenable, valued for good corrosion resistance in dry environments and dimensional stability. It is magnetic, making it suitable for appliances, decorative items, and architectural uses.

## Recommended for

- **Appliances:** stove panels, refrigerators, range hoods
- **Stainless furniture:** cabinets, backsplashes, decorative surfaces
- **Interior architectural components:** moldings, frames
- **Magnetic applications:** hinges, locks, supports



## Mechanical Properties

*Typical Value*


<b>Tensile Strength</b>	,~65,000 psi
<b>Yield Strength</b>	~30,000 psi
<b>Brinell Hardness</b>	~150 HB
<b>Elongation (2 in.)</b>	~25%
<b>Corrosion Resistance</b>	Good in dry indoor environments
<b>Weldability</b>	Good (risk of embrittlement varies with thickness)
<b>Heat Treatment</b>	Not hardenable

# Stainless Steel 17-4PH

Stainless steel 17-4PH (also called Type 630) is precipitation-hardenable. It combines mechanical strength, hardness, and dimensional stability, making it suitable for high-performance applications.

## Recommended for

- **Aerospace:** fasteners, landing gear, structural parts
- **Oil and energy industry:** valves, pumps, shafts
- **Medical and dental:** tools, guides, high-stress components
- **Precision mechanics:** gears, rings, high-grade bushings

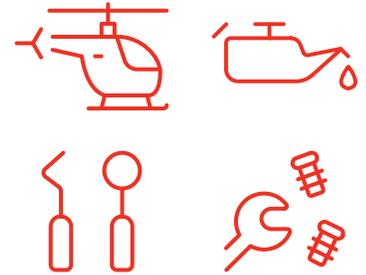

## Mechanical Properties


	H900	H1025	H1150
<b>Tensile Strength</b>	~200,000 psi	~155,000 psi	~130,000 psi
<b>Yield Strength</b>	~185,000 psi	~145,000 psi	~115,000 psi
<b>Rockwell Hardness</b>	~C44	~C38	~C33
<b>Elongation (2 in.)</b>	~10 %	~13 %	~16 %
<b>Corrosion Resistance</b>	Good	Good	Better
<b>Weldability</b>	Good	Good	Very good
<b>Heat Treatment</b>	Yes	Yes	Yes

# Stainless Steel 17-7PH

Stainless steel 17-7PH is also precipitation-hardenable, similar to 17-4PH but with better elasticity and excellent long-term mechanical performance. It is ideal for springs and flexible parts.

## Recommended for

- **Precision springs:** flat springs, coils, diaphragms
- **Aerospace and space:** fasteners, tension components, linkages
- **Instrumentation:** membranes, sensors, high-frequency springs
- **Flexible components:** mechanical arms, vibrating elements

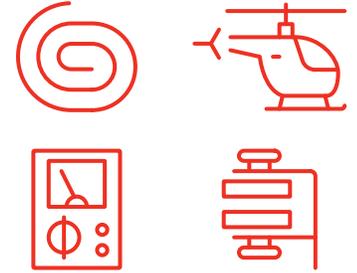

## Mechanical Properties

TH1050

CH900

**Tensile Strength**

~200,000 psi

~205,000 psi

**Yield Strength**

~185,000 psi

~200,000 psi

**Rockwell Hardness**

~C45

~C47

**Elongation (2 in.)**

~5-7%

~4-6%

**Corrosion Resistance**

Average to good

Average to good

**Weldability**

Average to good


Average

**Heat Treatment**

Yes


Yes

# Conversion Table




Fractions	Decimals	Millimetres
1/64	0.156	0.3969
1/32	0.313	0.7938
	0.394	1
3/63	0.469	1.1906
1/16	0.625	1.5875
5/64	0.781	1.9844
	0.787	2
3/32	0.938	2.3812
7/64	0.1094	2.7781
	0.1181	3
1/8	0.125	3.175
9/64	0.1406	3.5719
5/32	0.1563	3.9688
	0.1575	4
11/64	0.1719	4.3656
3/16	0.1875	4.7625
	0.1969	5
13/64	0.2031	5.1594
7/32	0.2188	0.5563
15/64	0.2344	5.9531
	0.2362	6
1/4	0.25	6.35
17/64	0.2656	6.7469
	0.2756	7
9/32	0.2813	7.1438
19/64	0.2969	7.5406
5/16	0.3125	7.9375
	0.315	8
21/64	0.3281	8.3344
11/32	0.3438	8.7313
	0.3543	9
23/64	0.3594	9.1281
3/8	0.3750	9.525
25/64	0.3906	9.9219
	0.3937	10
13/32	0.4063	10.3188

# Conversion Table (continued)



Fractions	Decimals	Millimetres
27/64	0.4219	10.7156
	0.4331	11
7/16	0.4375	11.1125
29/64	0.4531	11.5094
15/32	0.4688	11.9063
	0.4724	12
31/64	0.4844	12.3031
1/2	0.5	12.7
	0.5118	13
33/64	0.5156	13.0969
17/32	0.5313	13.4938
35/64	0.5469	13.8906
	0.5512	14
9/16	0.5625	14.2875
37/64	0.5781	14.6844
	0.5906	15
19/32	0.5938	15.0813
39/64	0.6094	15.4781
5/8	0.6250	15.875
	0.6299	16
41/64	0.6406	16.2719
21/32	0.6563	16.6688
	0.6693	17
43/64	0.6719	17.0656
11/16	0.6875	17.4625
45/64	0.7031	17.8594
	0.7087	18
23/32	0.7188	18.2563
47/64	0.7344	18.6531
	0.7480	19
3/4	0.75	19.05
49/64	0.7656	19.4469
25/32	0.7813	19.8438
	0.7874	20
51/64	0.7969	20.2406
13/16	0.8125	20.6375
	0.8268	21

# Tableau de conversion (suite)



Fractions	Decimals	Millimetres
53/64	0.8281	21.0344
27/32	0.8438	21.4313
55/64	0.8594	21.8281
	0.8661	22
7/8	0.875	22.225
57/64	0.8906	22.6219
	0.9055	23
29/32	0.9032	23.0188
59/64	0.9219	23.4156
15/16	0.9375	23.8125
	0.9449	24
61/64	0.9531	24.2094
31/32	0.9688	24.6063
	0.9843	25
63/64	0.9844	25.0031
1	1	25.4

# Angles



**Standard lengths: 12' and 20'.** Other lengths may be available, please contact your representative to review available options.

Dimension (in)	Dimension (mm)	Wall (in)	Wall (mm)	Weight (lb/ft)
3/4 x 3/4	19.05 x 19.05	1/8	3.18	0.59
1 x 1	25.4 x 25.4	1/8	3.18	0.8
		3/16	4.76	1.16
		1/4	6.35	1.49
1 1/4 x 1 1/4	31.75 x 31.75	1/8	3.18	1.01
		3/16	4.76	1.48
1 1/2 x 1 1/2	38.1 x 38.1	1/8	3.18	1.23
		3/16	4.76	1.8
		1/4	6.35	2.34
2 x 2	50.8 x 50.8	1/8	3.18	1.65
		3/16	4.76	2.44
		1/4	6.35	3.19
		3/8	9.53	4.7
2 1/2 x 2 1/2	63.5 x 63.5	3/16	4.76	3.07
		1/4	6.35	4.1
		3/8	9.53	5.9
3 x 3	76.2 x 76.2	3/16	4.76	3.71
		1/4	6.35	4.9
		3/8	9.53	7.2
4 x 4	101.6 x 101.6	1/4	6.35	6.6
		3/8	9.53	9.8

# Square and Rectangular HSS Tubes



**Standard lengths: 20' and 24'.** Other lengths may be available, please contact your representative to review available options.

Dimension (in)	Dimension (mm)	Wall (in)	Wall (mm)	Weight (lb/ft)
1/2 x 1/2	12.7 x 12.7	0.065	1.59	0.39
5/8 x 5/8	15.875 x 15.875	0.065	1.59	0.49
3/4 x 3/4	19.05 x 19.05	0.065	1.59	0.605
		0.12	3.05	1.13
1 x 1	25.4 x 25.4	0.065	1.59	0.826
		0.12	3.05	1.436
1 1/4 x 1 1/4	31.75 x 31.75	0.065	1.59	1.048
		0.12	3.05	1.93
1 1/2 x 1 1/2	38.1 x 38.1	0.065	1.59	1.269
		0.12	3.05	2.062
		0.188	4.76	3.63
1 3/4 x 1 3/4	44.5 x 44.5	0.065	1.59	1.49
		0.12	3.05	2.66
		0.188	4.76	3.75
2 x 2	50.8 x 50.8	0.065	1.59	1.711
		0.12	3.05	3.068
		0.188	4.76	4.46
		0.25	6.35	6.01
3 x 3	76.4 x 76.4	0.065	1.59	2.59
		0.12	3.05	4.97
		0.188	4.76	6.9
		0.25	6.35	9.35

# Round HSS Tubes



**Standard lengths: 20' and 24'.** Other lengths may be available, please contact your representative to review available options.

Dimension (in)	Dimension (mm)	Wall (in)	Wall (mm)	Weight (lb/ft)
0.25	6.4	0.035	0.89	0.08
0.312	7.9	0.065	1.65	0.172
0.375	9.5	0.049	1.24	0.171
		0.065	1.65	0.215
0.5	12.7	0.035	0.89	0.174
		0.065	1.65	0.302
0.75	19.1	0.065	1.65	0.476
		0.12	3.05	0.807
1	25.4	0.065	1.65	0.649
		0.12	3.05	1.128
1.25	31.8	0.065	1.65	0.823
		0.12	3.05	1.448
1.5	38.1	0.065	1.65	0.996
		0.12	3.05	1.769
1.75	44.5	0.065	1.65	1.17
		0.12	3.05	2.089
2	50.8	0.065	1.65	1.343
		0.12	3.05	2.409
		0.188	4.78	3.638
		0.25	3.65	4.673
2.5	63.5	0.065	1.65	1.69
		0.12	3.05	3.05
		0.25	6.35	6.008
3	76.2	0.065	1.65	2.037
		0.12	3.05	3.691
		0.188	4.78	5.646
		0.25	6.35	7.343

# Pipes



**Standard length: 20'.** Other lengths may be available — please contact your representative to review available options.

Dimension (in)	Outside Diameter (in)	Schedule	Wall Thickness (in)	Weight (lb/ft)
1/8	0.405	5	0.035	0.1383
		10	0.049	0.1863
		40	0.068	0.2447
		STD	0.068	0.2447
		80	0.095	0.3145
		XH	0.095	0.3145
1/4	0.54	5	0.049	0.257
		10	0.065	0.3297
		40	0.088	0.4248
		STD	0.088	0.4248
		80	0.119	0.5351
		XH	0.119	0.5351
3/8	0.675	5	0.049	0.3276
		10	0.065	0.4325
		40	0.091	0.576
		STD	0.091	0.576
		80	0.126	0.7388
		XH	0.126	0.7388
1/2	0.84	5	0.065	0.5383
		10	0.083	0.671
		40	0.109	0.851
		STD	0.109	0.851
		80	0.147	1.088
		XH	0.147	1.088
		160	0.187	1.304
		XXH	0.294	1.714
3/4	1.05	5	0.065	0.6838
		10	0.083	0.8572
		40	0.113	1.131
		STD	0.113	1.131
		80	0.154	1.474
		XH	0.154	1.474
		160	0.218	1.937
		XXH	0.308	2.441

# Pipes (continued)



Dimension (in)	Outside Diameter (in)	Schedule	Wall Thickness (in)	Weight (lb/ft)
1	1.315	5	0.065	0.8678
		10	0.109	1.404
		40	0.133	1.679
		STD	0.133	1.679
		80	0.179	2.172
		XH	0.179	2.172
		160	0.25	2.844
		XXH	0.358	3.659
		1 1/4	1.66	5
10	0.109			1.806
40	0.14			2.273
STD	0.14			2.273
80	0.191			2.997
XH	0.191			2.997
160	0.25			3.765
XXH	0.382			5.214
1 1/2	1.9			5
		10	0.109	2.085
		40	0.145	2.718
		STD	0.145	2.718
		80	0.2	3.631
		XH	0.2	3.631
		160	0.281	4.859
		XXH	0.4	6.408
		2	2.375	5
10	0.109			2.638
40	0.154			3.653
STD	0.154			3.653
80	0.218			5.022
XH	0.218			5.022
160	0.343			7.444
XXH	0.436			9.029
2 1/2	2.875			5
		10	0.12	3.531
		40	0.203	5.793
		STD	0.203	5.793
		80	0.276	7.661
		XH	0.276	7.661
		160	0.375	10.01
		XXH	0.552	13.7

# Pipes (continued)



Dimension (in)	Outside Diameter (in)	Schedule	Wall Thickness (in)	Weight (lb/ft)		
3	3.5	5	0.083	3.029		
		10	0.12	4.332		
		40	0.216	7.576		
		STD	0.216	7.576		
		80	0.3	10.25		
		XH	0.3	10.25		
		160	0.437	14.32		
		XXH	0.6	18.58		
		3 1/2	4	5	0.083	3.472
10	0.12			4.973		
40	0.226			9.109		
STD	0.226			9.109		
80	0.318			12.51		
XH	0.318			12.51		
XXH	0.636			22.85		
4	4.5			5	0.083	3.915
				10	0.12	5.613
		40	0.237	10.79		
		STD	0.237	10.79		
		60	0.281	12.66		
		80	0.337	14.98		
		XH	0.337	14.98		
		120	0.437	19.01		
		160	0.531	22.51		
		XXH	0.674	27.54		
		4 1/2	5	STD	0.247	12.53
XH	0.355			17.61		
XXH	0.71			32.53		
5	5.563	5	0.109	6.349		
		10	0.134	7.77		
		40	0.258	14.62		
		STD	0.258	14.62		
		80	0.375	20.78		
		XH	0.375	20.78		
		120	0.5	27.04		
		160	0.625	32.96		
		XXH	0.75	38.55		

# Pipes (continued)



Dimension (in)	Outside Diameter (in)	Schedule	Wall Thickness (in)	Weight (lb/ft)
6	6.625	5	0.109	7.585
		10	0.134	9.289
		40	0.28	18.97
		STD	0.28	18.97
		80	0.432	28.57
		XH	0.432	28.57
		120	0.562	36.39
		160	0.718	45.3
		XXH	0.864	53.16
		7	7.625	STD
XH	0.5			38.05
XXH	0.875			63.08
8	8.625	5	0.109	9.914
		10	0.148	13.4
		20	0.25	22.36
		30	0.277	24.7
		40	0.322	28.55
		STD	0.322	28.55
		60	0.406	35.64
		80	0.5	43.39
		XH	0.5	43.39
		100	0.593	50.87
		120	0.718	60.63
		140	0.812	67.76
		160	0.906	74.69
		XXH	0.875	72.42
		9	9.625	STD
XH	0.5			48.72

# Pipes (continued)



Dimension (in)	Outside Diameter (in)	Schedule	Wall Thickness (in)	Weight (lb/ft)
10	10.75	5	0.134	15.19
		10	0.165	18.7
		20	0.25	28.04
		30	0.307	34.24
		40	0.365	40.48
		STD	0.365	40.48
		60	0.5	54.74
		80	0.593	64.33
		XH	0.5	54.74
		100	0.718	76.93
		120	0.843	89.2
		140	1	104.1
		160	1.125	115.7
		11	11.75	STD
XH	0.5			60.07
12	12.75	5	0.165	22.18
		10	0.18	24.2
		20	0.25	33.38
		30	0.33	43.77
		40	0.406	53.53
		STD	0.375	49.56
		60	0.562	73.16
		80	0.687	88.51
		XH	0.5	65.42
		100	0.843	107.2
		120	1	125.5
		140	1.125	139.7
		160	1.312	160.3
		14	14	10
20	0.312			45.68
30	0.375			54.57
40	0.437			63.37
STD	0.375			54.57
60	0.593			84.91
80	0.75			106.1
XH	0.5			72.09
100	0.937			130.7
120	1.093			150.7
		140	1.25	170.2
		160	1.406	189.1

# Pipes (continued)



Dimension (in)	Outside Diameter (in)	Schedule	Wall Thickness (in)	Weight (lb/ft)
16	16	10	0.25	42.05
		20	0.312	52.36
		30	0.375	62.58
		40	0.5	82.77
		STD	0.375	62.58
		60	0.656	107.5
		80	0.843	136.5
		XH	0.5	82.77
		100	1.031	164.8
		120	1.218	192.3
		140	1.437	223.5
		160	1.593	245.1
		18	18	10
20	0.312			59.03
30	0.437			82.06
40	0.562			104.8
STD	0.375			70.59
60	0.75			138.2
80	0.937			170.8
XH	0.5			93.45
100	1.156			208
120	1.375			244.1
140	1.562			274.2
160	1.781			308.5
20	20			10
		20	0.375	78.6
		30	0.5	104.1
		40	0.593	122.9
		STD	0.375	78.6
		60	0.812	166.4
		80	1.031	208.9
		XH	0.5	104.1
		100	1.28	256.1
		120	1.5	296.4
		140	1.75	341.1
		160	1.968	379

# Pipes (continued)



Dimension (in)	Outside Diameter (in)	Schedule	Wall Thickness (in)	Weight (lb/ft)
22	22	10	0.25	58.07
		20	0.375	86.61
		30	0.5	114.8
		STD	0.375	86.61
		60	0.875	197.4
		80	1.125	250.8
		XH	0.5	114.8
		100	1.375	277
		120	1.625	353.6
		140	1.875	403
		160	2.125	451.1
24	24	10	0.25	63.41
		20	0.375	94.62
		30	0.562	140.8
		40	0.687	171.2
		STD	0.375	94.62
		60	0.968	238.1
		80	1.218	296.4
		XH	0.5	125.5
		100	1.531	367.4
		120	1.812	429.4
		140	2.062	483.1
160	2.343	541.9		
26	26	10	0.312	85.6
		20	0.5	136.2
		STD	0.375	102.6
		XH	0.5	136.2
28	28	10	0.312	92.26
		20	0.5	146.8
		30	0.625	182.7
		STD	0.375	110.6
		XH	0.5	146.8
30	30	10	0.312	98.93
		20	0.5	157.5
		30	0.625	196.1
		STD	0.375	118.6
		XH	0.5	157.5

# Pipes (continued)



Dimension (in)	Outside Diameter (in)	Schedule	Wall Thickness (in)	Weight (lb/ft)
32	32	10	0.312	105.6
		20	0.5	168.2
		30	0.625	209.4
		40	0.688	230.1
		STD	0.375	126.7
		XH	0.5	168.2
34	34	10	0.344	123.7
		20	0.5	178.9
		30	0.625	222.8
		40	0.688	244.8
		STD	0.375	134.7
		XH	0.5	178.9
36	36	10	0.312	118.9
		20	0.5	189.6
		30	0.625	236.1
		40	0.75	282.3
		STD	0.375	142.7
		XH	0.5	189.6

# Round Bars



**Standard lengths: 12' and 20'.** Other lengths may be available, please contact your representative to review available options.

<b>Dimension (in)</b>	<b>Dimension (mm)</b>	<b>Weight (lb/ft)</b>
1/8	3.18	0.042
3/16	4.76	0.094
1/4	6.35	0.167
5/16	7.94	0.26
3/8	9.53	0.376
7/16	11.11	0.511
1/2	12.7	0.667
9/16	14.29	0.845
5/8	15.88	1.043
3/4	19.05	1.502
7/8	22.23	2.044
1	25.4	2.67
1 1/8	28.58	3.38
1 1/4	31.75	4.172
1 3/8	34.93	5.049
1 1/2	38.1	6.009
1 5/8	41.28	7.051
1 3/4	44.45	8.178
2	50.8	10.68
2 1/4	57.15	13.519
2 1/2	63.5	16.69
3	76.2	24.03

# Flat Bars



**Standard lengths: 12' and 20'.** Other lengths may be available, please contact your representative to review available options.

Thickness (in)	Thickness (mm)	Width (in)	Width (mm)	Weight (lb/ft)
1/8	3.18	1/2	12.7	0.212
		3/4	19	0.319
		1	25.4	0.425
		1 1/4	31.8	0.531
		1 1/2	38.1	0.638
		2	50.8	0.85
		3	76.2	1.28
		4	101.6	1.7
		6	152.4	2.56
3/16	4.76	1/2	12.7	0.319
		3/4	19	0.478
		1	25.4	0.638
		1 1/4	31.8	0.797
		1 1/2	38.1	0.956
		2	50.8	1.28
		3	76.2	1.91
		4	101.6	2.55
		6	152.4	3.83
1/4	6.35	1/2	12.7	0.425
		3/4	19	0.638
		1	25.4	0.85
		1 1/4	31.8	1.063
		1 1/2	38.1	1.28
		2	50.8	1.7
		2 1/2	63.5	2.125
		3	76.2	2.55
		4	101.6	3.4
3/8	9.53	3/4	19	0.956
		1	25.4	1.28
		1 1/4	31.8	1.594
		1 1/2	38.1	1.91
		2	50.8	2.55
		2 1/2	63.5	3.188
		3	76.2	3.83

# Flat Bars (continued)



Thickness (in)	Thickness (mm)	Width (in)	Width (mm)	Weight (lb/ft)
1/2	12.7	3/4	19	1.275
		1	25.4	1.7
		1 1/4	31.8	2.125
		1 1/2	38.1	2.55
		2	50.8	3.4
		3	76.2	5.1
		4	101.6	6.8
3/4	19.05	2	50.8	5.1
1	25.4	1 1/4	31.8	4.25
		1 1/2	38.1	5.1
		2	50.8	6.8
		2 1/2	63.5	8.5
		3	76.2	15.3

# Square Bars



**Standard lengths: 12' and 20'.** Other lengths may be available, please contact your representative to review available options.

<b>Dimension (in)</b>	<b>Dimension (mm)</b>	<b>Weight (lb/ft)</b>
1/8	3.18	0.05
3/16	4.76	0.12
1/4	6.35	0.21
5/16	7.94	0.33
3/8	9.53	0.48
1/2	12.7	0.85
5/8	15.9	1.24
3/4	19	1.91
7/8	22.2	2.6
1	25.4	3.4
1 1/4	31.8	5.31
1 1/2	38.1	7.65

# Hexagonal Bars



**Standard length: 12'.** Other lengths may be available, please contact your representative to review available options.


<b>Dimension (in)</b>	<b>Dimension (mm)</b>	<b>Weight (lb/ft)</b>
1/4	6.35	0.18
3/8	9.53	0.41
1/2	12.7	0.74
5/8	15.9	1.15
3/4	19	1.66
7/8	22.2	2.25
1	25.4	2.95
1 1/8	28.6	3.73
1 1/4	31.8	4.6
1 3/8	34.9	5.57
1 1/2	38.1	6.63
1 5/8	41.3	7.78
1 7/8	47.6	10.35
2	50.8	11.78

# H-Beams



**Standard length: 20'.** Other lengths may be available, please contact your representative to review available options.

Height (in)	Flange Width (in)	Web Thickness (in)	Weight (lb/ft)
3	2 3/8	1/4	6.6
4	2 3/4	1/4	8.44
5	3	0.326	11.37
6	3.33	0.359	14.9

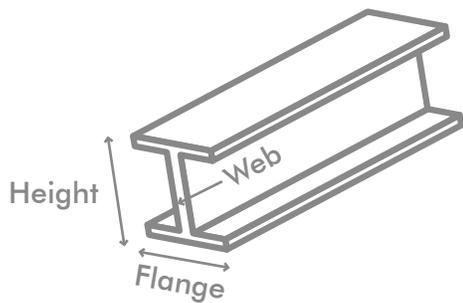


- Height** **Total vertical distance** between the two flanges of a beam.
- Flange** **Horizontal part** of the beam at the top and bottom, which distributes the loads.
- Web** **Central vertical wall** connecting the two flanges, supporting shear forces.

# U-Channels



**Standard lengths: 12' and 20'.** Other lengths may be available, please contact your representative to review available options.

Dimension (in)			Dimension (mm)			Weight (lb/ft)
Height	Flange	Web	Height	Flange	Web	
4	1.721	0.321	101.6	43.71	8.153	7.57
5	1.75	0.19	127	44.45	4.826	5.35
	1.885	0.325		47.88	8.255	9.152
6	1.92	0.29	152.4	48.77	7.366	9.313
	1.034	0.314		26.26	7.976	8.102
	1.9	0.343		48.26	8.712	10.841
	2.157	0.437		54.79	11.1	14.306
8	2.25	0.22	203.2	57.15	5.588	9.201
	2.343	0.33		59.51	8.382	13.763
	2.527	0.407		64.19	10.338	17.276
10	2.4	0.24	254	60.96	6.096	11.919
	2.739	0.379		69.57	9.627	19.348
	2.886	0.526		73.3	13.36	26.852
	3.033	0.473		77.04	12.014	24.802
12	2.942	0.282	304.8	74.73	7.163	16.939
	3.047	0.387		77.39	9.83	23.245
	3.179	0.51		80.75	12.954	30.665
15	3.4	0.4	381	86.36	10.16	29.131

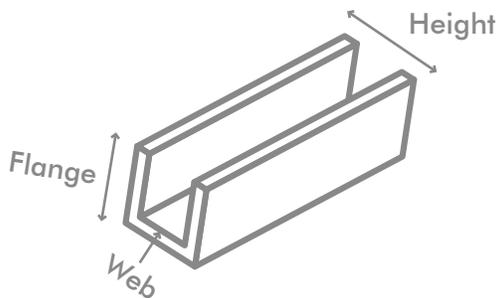

- Height** **Total vertical distance** of the profile, measured between the outer edges of the flanges.
- Flange** **Vertical side portion** of the profile, parallel to the web. It gives the channel its lateral rigidity.
- Web** **Central horizontal wall** connecting the two flanges. It forms the base of the channel.

# Plates



**Standard formats: 4'x8' and 5'x10'.** Other formats may be available, please contact your representative to review available options.

<b>Thickness (in)</b>	<b>Thickness (mm)</b>	<b>Weight (lb/ft<sup>2</sup>)</b>
3/16	4.78	8.579
1/4	6.35	11.162
3/8	9.53	16.496
1/2	12.7	21.663
5/8	15.88	26.83
3/4	19.05	32.12
1	25.4	42.67
1 1/4	31.75	53
1 1/2	38.1	63.34
1 3/4	44.45	73.67
2	50.8	84.01

# Sheets



**Standard formats: 4'x8' and 5'x10'.** Other formats may be available — please contact your representative to review available options.

<b>Gauges</b>	<b>Thickness (in)</b>	<b>Thickness (mm)</b>	<b>Weight (lb/ft<sup>2</sup>)</b>
10	0.140	3.556	5.906
11	0.119	3.023	5.25
12	0.109	2.769	4.594
14	0.078	1.984	3.281
16	0.063	1.588	2.625
18	0.05	1.27	2.1
20	0.038	0.953	1.57
22	0.031	0.792	1.313
24	0.025	0.635	1.05


# Expanded Metals



**Standard format: 4'x8'.** Other formats may be available, please contact your representative to review available options.

## Flattened stainless steel

Patterns		Dimension		Thickness	Weight (lb/ft <sup>2</sup> )
		SWD	LWD		
3/16	22F	0.293	0.5	0.029	0.4
	20F	0.293	0.5	0.035	0.47
1/2	18F	0.57	1.2	0.04	0.64
	16F	0.57	1.2	0.05	0.8
	13F	0.57	1.2	0.07	1.43
3/4	16F	1.04	2	0.05	0.57
	13F	1.04	2	0.07	0.72
	9 (10)F	1.091	2	0.115	1.43
1 1/2	16F	1.5	3	0.05	0.4
	13F	1.5	3	0.07	0.51
	9 (10)F	1.5	3	0.115	1.11

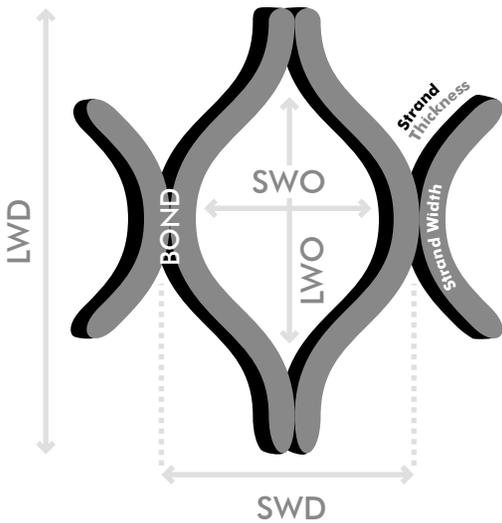

- LWD** Length of the mesh in the **longest direction** (stretched mesh).
- SWD** Width of the mesh in the **shortest direction**.
- LWO** Length **between the internal tips** of the mesh (excluding strands).
- SWO** Width **between the internal strands** of the mesh.
- BOND** **Uncut metal area** linking the mesh openings together.

# Expanded Metals (continued)



## Regular stainless steel

Patterns		Dimension		Thickness	Weight (lb/ft <sup>2</sup> )
		SWD	LWD		
1/2	20	0.5	1.2	0.037	0.5
	18	0.5	1.2	0.05	0.73
	16	0.5	1.2	0.062	0.91
	13	0.5	1.2	0.093	1.87
3/4	18	0.923	2	0.05	0.48
	16	0.923	2	0.062	0.6
	13	0.923	2	0.093	0.91
	9	0.923	2	0.14	2.05
1 1/2	16	1.33	3	0.062	0.45
	13	1.33	3	0.093	0.68
	9	1.33	3	0.14	1.37

# Security Mesh



**Standard lengths: 3', 4', 5', 6', and 8'.** Other lengths may be available, please contact your representative to review available options.

## Diamond-pattern safety grating


Width (in)	Gauges	Height (in)	Weight (lb/ft)
4 ¾ (2 diamants)	14	2	2.5
7 (3 diamants)	14	2	3.2
9 ½ (4 diamants)	16	2	3.2
	14	2	3.7
11 ¾ (5 diamants)	16	2	3.7
	14	2	4.5



## Embossed-pattern safety grating

Width (in)	Gauges	Height (in)	Weight (lb/ft)
5 (2 trous)	14	2	2.5
7 (3 trous)	14	2	2.8
10 (5 trous)	14	2	3.2
12 (6 trous)	14	2	3.8

# Gratings



**Standard lengths: 3', 4', 5', 6', and 8'.** Other lengths may be available, please contact your representative to review available options.

## Welded stainless steel grating (19S)

Side Height (in)	Thickness (in)	19S4 Weight (lb/ft <sup>2</sup> )	19S2 Weight (lb/ft <sup>2</sup> )	Type
3/4	1/8	3.9	4.4	Plain
	3/16	5.6	6.2	Plain
1	1/8	5	5.5	Plain or Serrated
	3/16	7.2	7.8	Plain or Serrated
1 1/4	1/8	6.1	6.6	Plain or Serrated
	3/16	8.9	9.5	Plain or Serrated
1 1/2	1/8	7.2	7.7	Plain or Serrated
	3/16	10.5	11.2	Plain or Serrated
1 3/4	3/16	12.2	12.8	Plain or Serrated
2	3/16	13.9	14.5	Plain or Serrated
2 1/4	3/16	15.5	16.1	Plain or Serrated
2 1/2	3/16	17.2	17.8	Plain or Serrated

## Pressed stainless steel grating (19SP)

Side Height (in)	Thickness (in)	19SP4 Weight (lb/ft <sup>2</sup> )	19SP2 Weight (lb/ft <sup>2</sup> )	Type
3/4	1/8	4.3	5.2	Plain
	3/16	6.4	7.8	Plain
1	1/8	5.4	6.3	Plain or Serrated
	3/16	8.1	9.5	Plain or Serrated
1 1/4	1/8	6.8	8.1	Plain or Serrated
	3/16	10.2	12.1	Plain or Serrated
1 1/2	1/8	7.9	9.2	Plain or Serrated
	3/16	11.8	13.8	Plain or Serrated
1 3/4	3/16	13.5	15.4	Plain or Serrated
2	3/16	15.2	17.1	Plain or Serrated
2 1/4	3/16	16.8	18.7	Plain or Serrated
2 1/2	3/16	18.5	20.4	Plain or Serrated